


NOTE REFERENCE

- (A) SEE FIGURE 6030.16 FOR BOXOUT DETAILS,
- (B) INTAKE CASTING (SEE PLANS)
SEE FIGURE 6030.13, 6030.14.
- (C) OPTIONAL CONSTRUCTION JOINT. SECURE WITH KEYWAY (SHOWN) OR NO. 4 X 12" REBAR DOWELS AT 12" SPACING ALL AROUND.
- (D) CONCRETE BASE - POURED IN PLACE OR PRECASTED
- (E) UNDISTURBED SOIL
- (F) PIPE DIAMETER AS SHOWN ON PLANS
MAX.=30" DIA. ON PERPENDICULAR CURB.
18" DIA. ON PARALLEL CURB.
- (G) CONCRETE SHAPED INVERT

REINFORCEMENT:

1. WALLS - #4 BARS AT 15" BOTH WAYS
2. DIAG. BARS AT ALL CIRCULAR OPENINGS

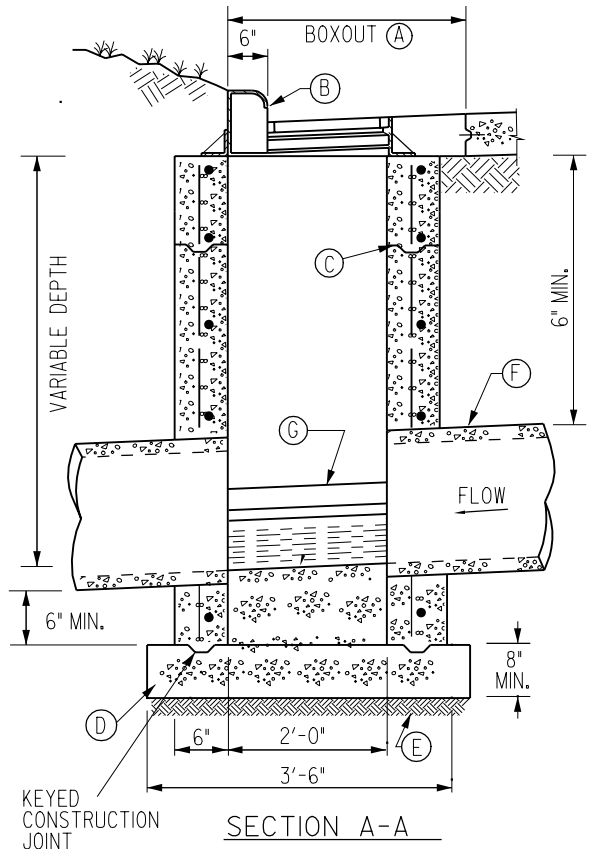

I	01/25/01	
REV.	DATE	BY
DATE: 01-01-98		

SINGLE, TYPE "M-A" INTAKE

FIGURE: 6030.1

SHEET 1 OF 1